




Stainless Steel Countersunk Head Round Shank -open- ESM

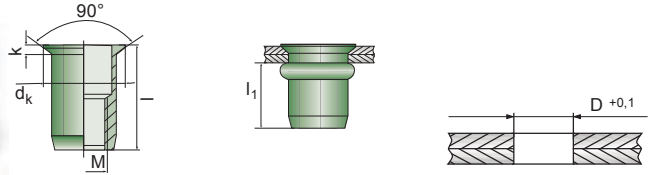

| M | | D | d _k | l | k | l ₁ max. | No. | |
|-----------|-----------|-----|----------------|------|-----|------------------------|----------------|-----|
| M4 | 1,5 – 4,0 | 6,0 | 8,3 | 12,0 | 1,5 | 8,0 | 10.859.040.400 | 500 |

1.4567 4 Nm 7000 N

| | | | | | | | | |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|
| M5 | 1,5 – 4,5 | 7,0 | 9,3 | 13,5 | 1,5 | 8,5 | 10.859.050.450 | 500 |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|

1.4567 6 Nm 11000 N

| M | | D | d _k | l | k | l ₁ max. | No. | |
|-----------|-----------|-----|----------------|------|-----|------------------------|----------------|-----|
| M6 | 1,5 – 4,5 | 9,0 | 11,3 | 16,0 | 1,5 | 10,0 | 10.859.060.450 | 500 |

1.4567 11 Nm 18000 N


| | | | | | | | | |
|-----------|-----------|------|------|------|-----|------|----------------|-----|
| M8 | 1,5 – 4,5 | 11,0 | 13,3 | 18,0 | 1,5 | 11,5 | 10.859.080.450 | 500 |
|-----------|-----------|------|------|------|-----|------|----------------|-----|

1.4567 24 Nm 27000 N

| | | | | | | | | |
|------------|-----------|------|------|------|-----|------|----------------|-----|
| M10 | 1,5 – 4,0 | 13,0 | 15,7 | 22,0 | 1,6 | 14,5 | 10.859.100.400 | 250 |
|------------|-----------|------|------|------|-----|------|----------------|-----|

1.4567 50 Nm 40000 N

Stainless Steel Countersunk Head Round Shank -open- *knurled* ESM-R

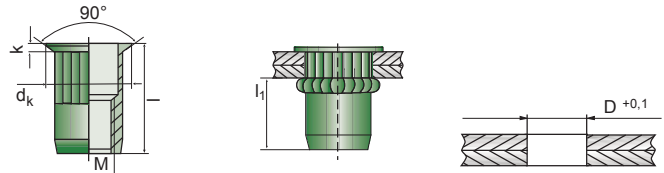

| M | | D | d _k | l | k | l ₁ max. | No. | |
|-----------|-----------|-----|----------------|------|-----|------------------------|----------------|-----|
| M4 | 1,5 – 4,0 | 6,0 | 8,3 | 12,0 | 1,0 | 8,0 | 10.865.040.400 | 500 |

1.4567 6500 N

| | | | | | | | | |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|
| M5 | 1,5 – 4,5 | 7,0 | 9,3 | 13,5 | 1,0 | 8,5 | 10.865.050.450 | 500 |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|

1.4567 10000 N

| M | | D | d _k | l | k | l ₁ max. | No. | |
|-----------|-----------|-----|----------------|------|-----|------------------------|----------------|-----|
| M6 | 1,5 – 4,5 | 9,0 | 11,3 | 16,0 | 1,0 | 10,0 | 10.865.060.450 | 500 |
| | 4,5 – 6,5 | | | 12,0 | 1,5 | | 10.865.060.650 | |

1.4567 17000 N


| | | | | | | | | |
|-----------|-----------|------|------|------|-----|------|----------------|-----|
| M8 | 1,5 – 4,5 | 11,0 | 13,3 | 18,0 | 1,5 | 12,0 | 10.865.080.450 | 500 |
| | 3,5 – 6,5 | | | 13,7 | | | 21,0 | |

1.4567 25000 N

| | | | | | | | | |
|------------|-----------|------|------|------|-----|------|----------------|-----|
| M10 | 1,5 – 4,0 | 13,0 | 15,7 | 22,0 | 1,6 | 14,5 | 10.865.100.400 | 250 |
|------------|-----------|------|------|------|-----|------|----------------|-----|

1.4567 38000 N

Stainless Steel Small Countersunk Head Round Shank -open- ESM-KLSK

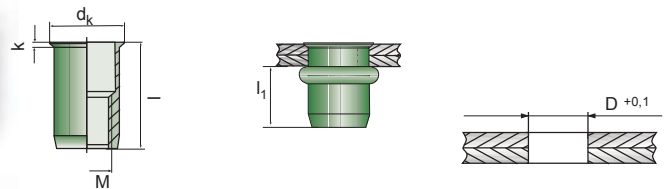

| M | | D | d _k | l | k | l ₁ max. | No. | |
|-----------|-----------|-----|----------------|-----|-----|------------------------|----------------|-----|
| M3 | 0,5 – 2,0 | 5,0 | 6,0 | 8,5 | 0,5 | 7,0 | 10.802.030.200 | 500 |

1.4567 2 Nm 4500 N

| | | | | | | | | |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|
| M4 | 0,5 – 2,5 | 6,0 | 7,0 | 10,5 | 0,5 | 8,0 | 10.802.040.250 | 500 |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|

1.4567 4 Nm 7000 N

| | | | | | | | | |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|
| M5 | 0,5 – 3,0 | 7,0 | 8,0 | 12,0 | 0,5 | 8,5 | 10.802.050.300 | 500 |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|

1.4567 6 Nm 11000 N

| M | | D | d _k | l | k | l ₁ max. | No. | |
|-----------|-----------|-----|----------------|------|-----|------------------------|----------------|-----|
| M6 | 0,5 – 3,0 | 9,0 | 10,0 | 14,5 | 0,5 | 10,0 | 10.802.060.300 | 500 |

1.4567 11 Nm 18000 N

| | | | | | | | | |
|-----------|-----------|------|------|------|-----|------|----------------|-----|
| M8 | 0,5 – 3,0 | 11,0 | 12,0 | 16,5 | 0,5 | 11,5 | 10.802.080.300 | 500 |
|-----------|-----------|------|------|------|-----|------|----------------|-----|

1.4567 24 Nm 27000 N

| | | | | | | | | |
|------------|-----------|------|------|------|-----|------|----------------|-----|
| M10 | 1,5 – 3,5 | 13,0 | 14,0 | 19,5 | 0,7 | 14,0 | 10.802.100.350 | 250 |
|------------|-----------|------|------|------|-----|------|----------------|-----|

1.4567 50 Nm 40000 N