

... FOR ALL Grip Ranges

NEW!

For the perfect handling of OPTO® multigrip blind rivet nuts: The **strength controlled** pneumatic-hydraulic tool **VNG 703**. Details on [page 130!](#)





Small grip range



Medium grip range



Large grip range

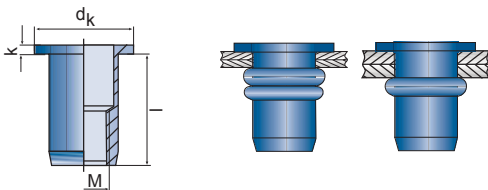

Steel Flat Head Round Shank - open OPTO-SFM

M		D	d _k	I	k	No.	
M4	0,5 – 6,0	6,0	10,0	14,0	0,8	10.895.040.600	500

QSt 32-3 [1.0303] 4 Nm 5200 N

M5	0,5 – 6,0	7,0	11,0	15,0	1,0	10.895.050.600	500
-----------	-----------	-----	------	------	-----	----------------	-----



QSt 32-3 [1.0303] 6 Nm 9500 N

M		D	d _k	I	k	No.	
M6	0,5 – 6,0	9,0	13,0	17,5	1,5	10.895.060.600	500

QSt 32-3 [1.0303] 11 Nm 15500 N

M8	0,5 – 7,5	11,0	16,0	21,5	1,5	10.895.080.750	500
-----------	-----------	------	------	------	-----	----------------	-----

QSt 32-3 [1.0303] 24 Nm 21500 N

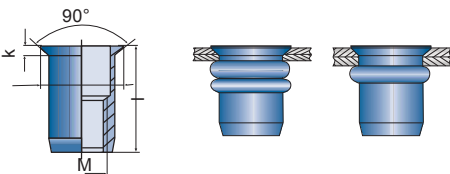

Steel Countersunk Head Round Shank - open OPTO-SSM

M		D	d _k	I	k	No.	
M4	1,5 – 6,0	6,0	10,0	14,0	1,5	10.895.400.600	500

QSt 32-3 [1.0303] 4 Nm 5200 N

M5	1,5 – 6,0	7,0	11,0	15,0	1,5	10.895.500.600	500
-----------	-----------	-----	------	------	-----	----------------	-----

QSt 32-3 [1.0303] 6 Nm 9500 N

M		D	d _k	I	k	No.	
M6	1,5 – 6,0	9,0	13,0	17,5	1,5	10.895.600.600	500

QSt 32-3 [1.0303] 11 Nm 15500 N

M8	1,5 – 7,5	11,0	16,0	21,5	1,5	10.895.800.750	500
-----------	-----------	------	------	------	-----	----------------	-----

QSt 32-3 [1.0303] 24 Nm 21500 N